


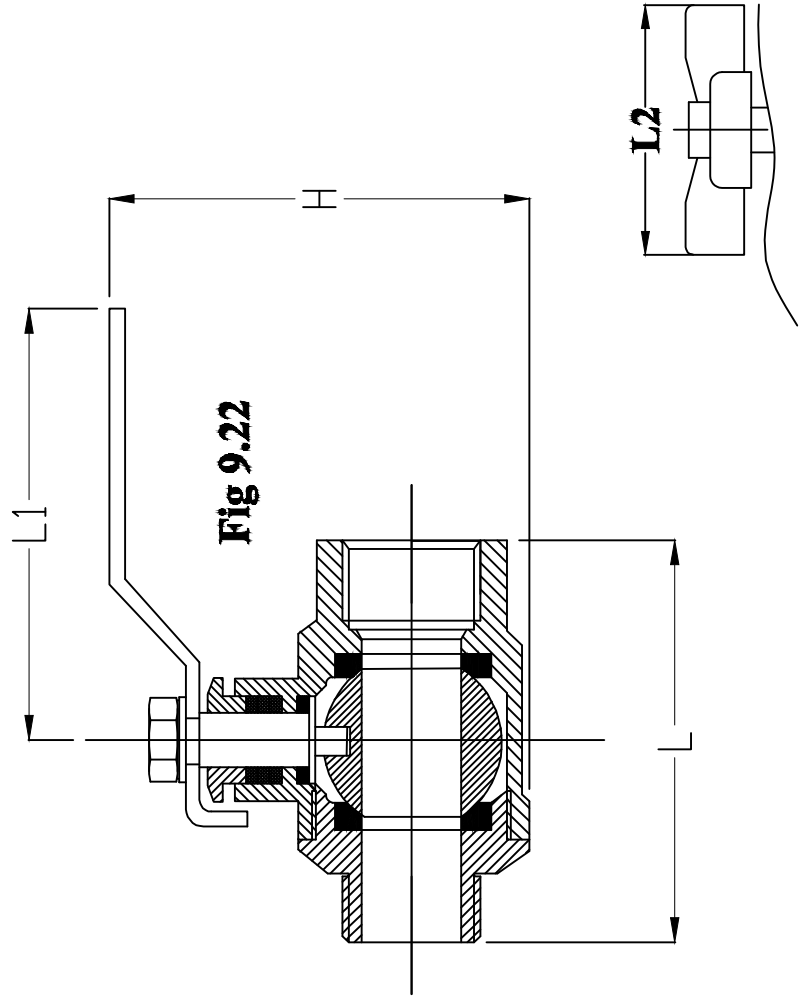

Dimensiuni

Varianțe	Dn	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
9.22	L	45	45	54	62	73	86	97.3	107.5			
	H	42	42	50.5	55	64.7	72	87.5	98			
	Masa	0.145	0.14	0.205	0.315	0.525	0.81	1.19	1.58			
Dim.	L1	80	80	90	100	116	122	140	140	240	240	240
	L2	52	52	52	62	62						
	Ø	10	10	15	20	25	32	40	50	61	74	95
	P3	40	40	40	40	40	30	30	20	18	18	18

Caracteristici tehnice:

- Presiunea nominala:16-40[bar]
- Diametru nominal:1/4"-4"
- Temperatura max.de lucru:120°C

VARIANTE CONSTRUCTIVE:

- Cuplare MM,manevra cu levier: Fig.9.22
- Cuplare MM,manevra cu fluture: Fig.9.22.f

DOMENII DE UTILIZARE:

- Instalatii de apa
- Presiunea maxima- conform tabel
- Temperatura maxima: 120°C

Corp	Alama
Obturator sferic	Alama cromata
Tija	Alama
Scaun	PTFE
Garnitura presetupa	PTFE
Denumire reper	Material
Desenat: F.I.V.	ROBINET CU OBTURATOR SFERIC
EUDIS VALVES	ALAMA
	CU TRECERE TOTALA
	Dn 1/4"-4"
EUDIS SA	
Controlat : S.S.	
Fig.9.22	
Data: 05.11.2020	
Fig.9.22	