


UTILIZARI:
 -Abur
 -Produce petroliere
 -Alte fluide compatibile cu materialele robinetului
 -Temp.max. de lucru: 180°C

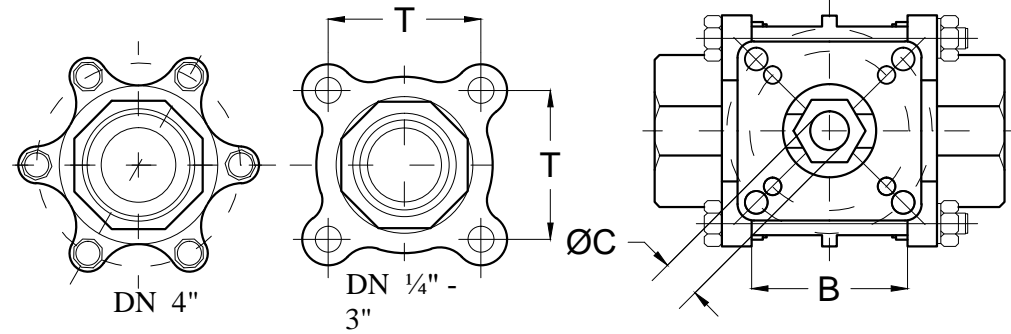

14	Opritor	AISI304
13	Protectie maner	Plastic
12	Piulita	AISI304
11	Saiba	AISI304
10	Maner	AISI304
9	Presetupa	AISI304
8	Garnitura etansare	PTFE
7	Garnitura pres.	PTFE
6	Tija	AISI 304
5	Inel "O"	15%R-PTFE
4	Inel de etansare	15%R-PTFE + INOX
3	Sfera	OTEL ASTM A351 Gr.CF8
2	Corp lateral	OTEL ASTM A216 WCB
1	Corp	OTEL ASTM A216 WCB

REP	DENUMIRE	MATERIAL
Desenat: F.I.V.	ROBINET CU OBTURATOR SFERIC	
EUDIS VALVES	OTEL CARBON	Model din 3 piese
	DN 1/4"-4"	PN conf. diagramei
	EUDIS S.A	

DN	Ø	L	B	E	H	H1	H4	C	T	W	Sw	Bw	Greutate (kg)
1/4"	11.5	63.5	22.5	112	73	8.5	37	9	31	28	14.2	13.7	0.64
3/8"	12.5	63.5	22.5	112	73	8.5	37	9	31	28	17.5	17.1	0.62
1/2"	15	63.5	22.5	112	73	8.5	37	9	31	28	21.8	21.3	0.58
3/4"	20	72.5	27.5	112	80.8	8.5	45	9	35	34	27.4	26.7	0.75
1"	25	81	34	136	90.5	11.4	53.5	9	41	42	34.1	33.4	1.03
1 1/4"	32	94.5	42.5	185	98.7	11.4	59	9	49	50	42.7	42.2	1.62
1 1/2"	38	108	52	197.9	115.3	14	74.8	14	59	58	49	48.3	2.5
2"	50	121.5	63.5	197.9	124	13.7	83.5	14	71	70	61	60.3	3.7
2 1/2"	65	157.5	85.5	264	155	18	108.8	17	91	88	77	73	7.8
3"	80	190	102	264	208.5	18	118.3	17	107	103	90	88.9	11
4"	100	225	129	325	216.7	23	153.8	17	195	128	115.3	114.3	22

Verificat: S.S.
 NUME FISIER: Fig.9.41
 DATA: 15.01.2021
 Fig.9.41