


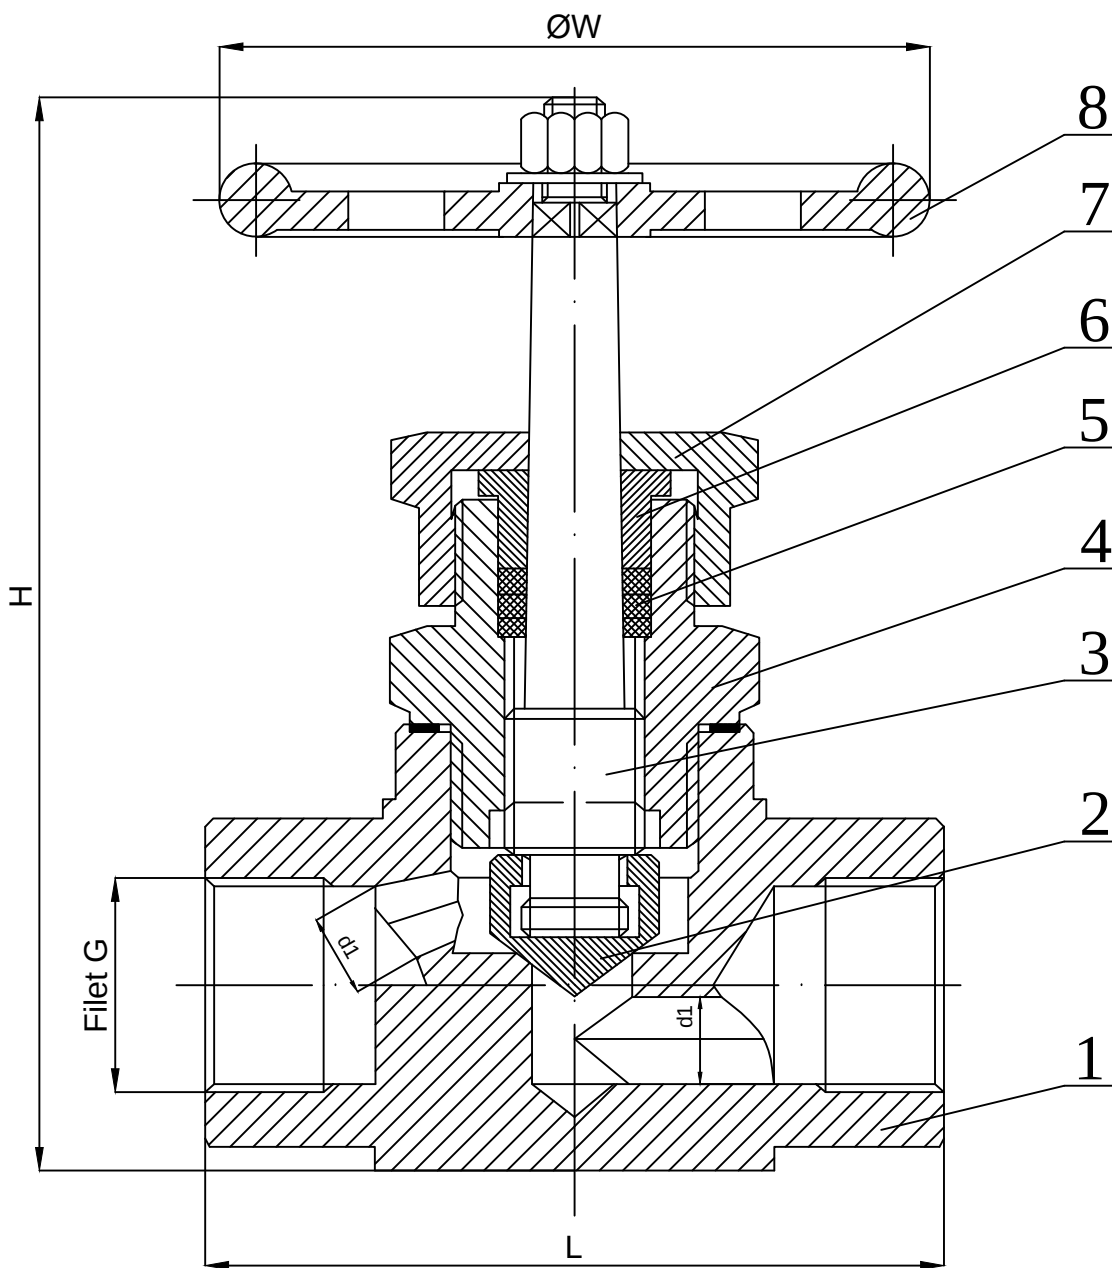

PN	DN (inch)	DN (mm)	L	H	ØW	d1	Filet
210	3 /8"	10	75	125	80	6.5	G3/8
	1 /2"	15	85	140	80	9	G1/2
	3 /4"	20	95	155	100	11	G3/4
	1	25	110	165	100	12	G 1

CARACTERISTICI TEHNICE:

Presiune nominala:210[bar]

Diametrul nominal:10....25 (3/8"....1")[mm]

Temperatura de lucru:-29°C....+121°C

Actionare:manuala cu roata de manevra

LIMITE DE UTILIZARE:

Apa ;Abur;Gaze

Produse petroliere

Alte fluide asemanatoare

cu actiune slab coroziva si

compatibile cu materialele robinetului

CONSTRUCTIE:

Corp drept mufa-mufa

Ventil in forma de con

Montare:pe capetele de eruptie

Legatura:mufa-mufa:filet G(3/8",1/2",3/4",1")

Teste: Rezistenta:1.5xPN

Etanseitate:1.1xPN

8	Roata de manevra	Otel ASTM 216 WCB	
7	Capac filetat	Otel ASTM A322-4130 API6A Galvanizat	
6	Presetupa	Otel A105N	
5	Garnitura	PTFE+25% grafit	
4	Stut	Otel ASTM A322-4130	
3	Tija	Otel AISI 420	
2	Ventil	Otel AISI 420	
1	Corp	Otel ASTM 487-4C	
REP	DENUMIRE	MATERIAL	
Desenat: F.I.V.	ROBINET CU AC DREPT		Verificat: S.S.
EUDIS VALVES	OTEL		Nume fisier : Fig.7.50
	DN 10-25	PN210	DATA: 24.11.2020
	EUDIS S.A		Fig.7.50.RO