


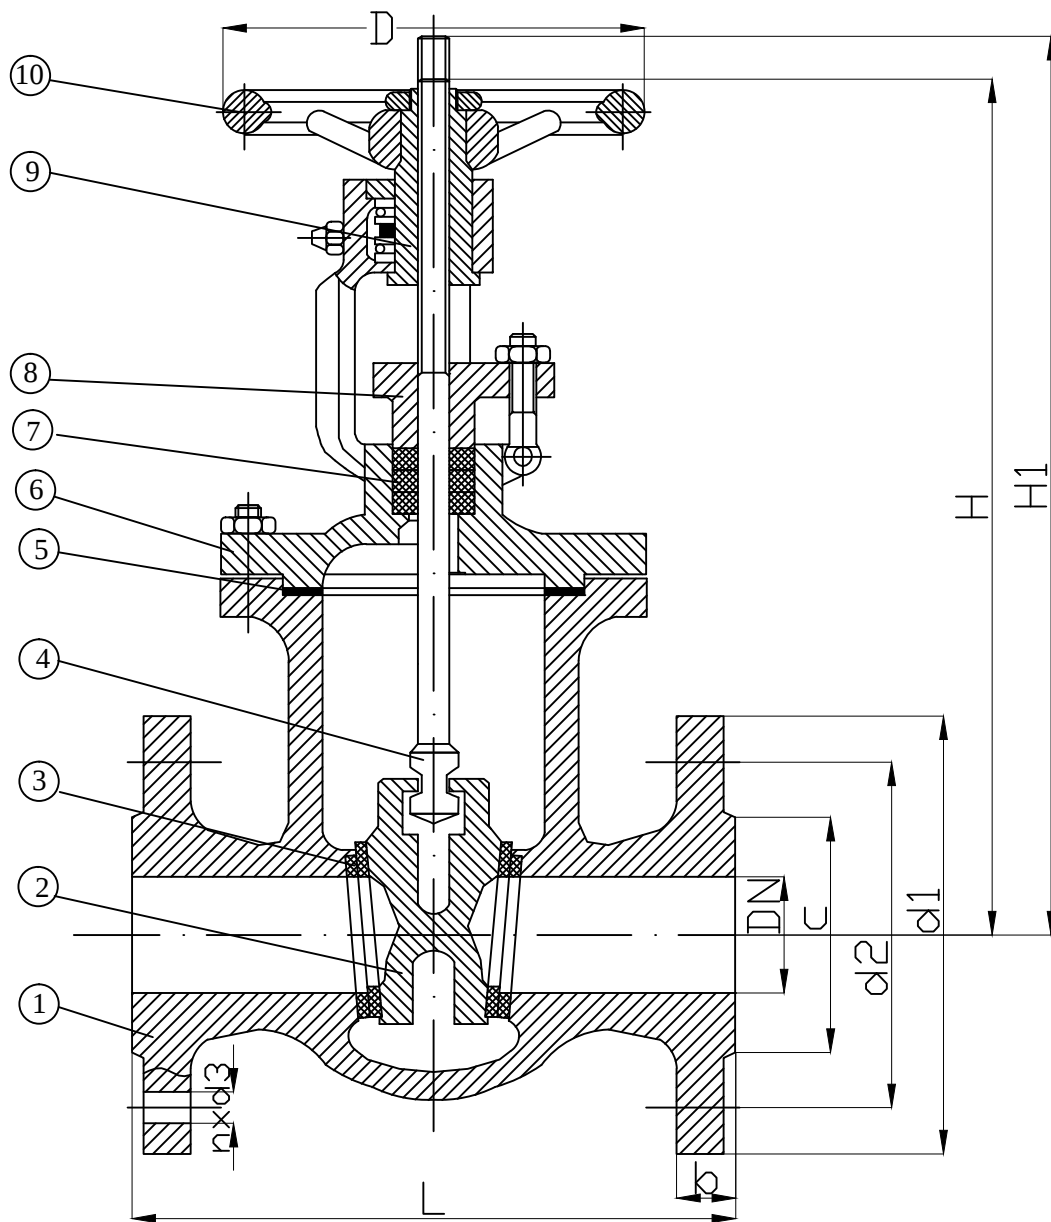

UTILIZARE:

-Apa;aer;abur;
-Produse petroliere;
-Alte fluide compatibile
cu materialele robinetului

CARACTERISTICI TEHNICE:

-Presiune nominala: 16 [bar]
-Diametru nominal:50-1200 [mm]
-Temperatura de lucru: -29°...450°C
-Etansare 13Cr/13Cr
-Actionare: manuala cu roata de manevra

CONSTRUCTIE:

-Constructie conf. DIN3352
-Tija ascendenta
-Flanse conf. DIN2501/1, PN16
-Lungimi conf. DIN 3202/1 linie F5
-Test Hidraulic DIN3230
-Rezistenta:1.5xPN
-Etanseitate:1.1xPN

DN	L	d1	d2	nxd3	c	D	b	H	Greutate(kg)
50	250	165	125	4x18	102	220	18	407	28
65	270	185	145	4x18	122	220	18	395	32
80	280	200	160	8x18	138	275	20	455	45
100	300	220	180	8x18	158	275	20	510	55
125	325	250	210	8x18	188	360	22	585	78
150	350	285	240	8x22	212	360	22	640	96
200	400	340	295	12x22	268	360	24	810	158
250	450	405	355	12x26	320	450	26	1040	230
300	500	460	410	12x26	378	450	28	1120	340
350	550	520	470	16x26	438	450	30	1270	395
400	600	580	525	16x30	490	560	32	1420	565
500	700	710	650	20x33	610	630	36	1790	880
600	800	840	770	20x36	725	700	40	1990	1245
700	900	910	840	24x36	795	900	42	2420	2200
800	1000	1025	950	24x39	900	900	42	2750	3820
1000	1200	1255	1170	28x42	1115	1000	46	3850	5340
1200	1400	1485	1390	32x48	1330	1200	48	4400	7045

Presiune Nominala	Temperatura °C							
	120	200	250	300	350	400	425	450
	Presiune maxima de serviciu (bar)							
16	16	13	11	10	-	-	-	-

10	ROATA DE MANEVRA	OTEL CARBON
9	BUCSA FILETATA	ALAMA
8	PRESETUPA	INOX 304
7	GARNITURA TIJEI	GRAFIT
6	CAPAC	INOX 304/ A351CF8M
5	GARNITURA	GRAFIT
4	TIJA	INOX X20CR13
3	SCAUN	INOX 304/INOX316
2	SERTAR	INOX 304/INOX316
1	CORP	INOX 304/ A351CF8M
Rep.	DENUMIRE	MATERIAL

Desenat: F.I.V.	ROBINET CU SERTAR PANA		Verificat: S.S
EUDIS VALVES	TIJA ASCENDENTA		Nume Fisier: Fig.8.50 IN
	DN 50-1200 mm	PN 16	DATA: 17.03.2015
	EUDIS S.A.		Fig.8.50 IN